



江苏新美源机械有限公司
JIANGSU XINMEIYUAN MACHINERY CO., LTD.

地址Add: 张家港市乐余经济开发区
Leyu Economic Development Zone, Zhangjiagang City
电话Tel: 0512-58600009 传真Fax: 0512-58636963
网址Http: //www.zjgxmy.com



饮料机械专业制造商
PROFESSIONAL MANUFACTURER
OF BEVERAGE MACHINERY



饮料机械专业制造商
PROFESSIONAL MANUFACTURER
OF BEVERAGE MACHINERY





企业文化 ENTERPRISE CULTURE

企业宗旨：精诚合作、锐意进取、不断创新、追求卓越；
企业目标：构建金牌企业，打造金牌服务；
企业精神：诚信为本，有诺必践，恪尽职守，率先垂范；
行为准则：服务至诚，管理至善，员工至美；
质量方针：致力提供优质服务，不断超越顾客需求；
经营理念：创新是企业的生命。

Enterprise principle: cooperating sincerely, exploring bravely,
innovating continuously and pursuing excellence
Enterprise goal: building a golden enterprise and providing
supreme service
Enterprise spirit: sincerity based, keeping promises,
fulfilling duties scrupulously and setting examples
Behavior principle: sincere service, excellent management
and outstanding personnel
Quality policy: devoted to providing supreme service to
continuously exceed customer demands
Business philosophy: Innovation is the life of our enterprise.

关于新美源

ABOUT XINMEIYUAN

公司坚持以市场为导向，科技为龙头，质量为主线，服务为保障，诚信为基础。公司遵循ISO9001:2000国际质量管理体系模式，建立健全了质量保证体系，强有力地保证了公司产品的质量和性能。公司研究所技术力量雄厚。公司售后服务部是专职负责我公司产品的安装调试和维护、维修的部门，也是公司维系顾客的窗口，“我就是顾客”使服务人员时时都能一切为用户着想，把用户放在心中。真正让用户体会到“顾客是上帝”的深刻含义。

企业主导产品：桶装饮用水生产线、小瓶饮用水灌装生产线、含汽饮料灌装生产线、茶果汁热灌装生产线、水处理设备、含汽易拉罐饮料生产线、玻璃瓶灌装设备、辅助设备、非标设备测绘、设计及改造、整厂工程服务。

本公司设备的用户遍及全国二十多个省市自治区；同时产品出口日本、中东、东南亚、南非、俄罗斯、独联体等国家和地区。公司除生产及销售设备外，还提供各种技术服务，帮助用户进行设备平面布置设计，解答用户工艺咨询，用户人员技术培训和操作指导等。

Our company insists on taking the market as the guide, technology as the lead, quality as the main line, service as the guarantee and sincerity as the foundation. By complying with the ISO9001:2000 international quality management system, we have established a perfect quality assurance system to provide a powerful guarantee for the quality and performance of our products. We have powerful technical strength in our research institute. In addition to being responsible for installation, commissioning, maintenance and servicing of our products, our after-sales service department is also a window that connects us with our customers. "I am a customer" makes service personnel always think for users and give priority to users, so as to make users experience the real meaning of "The Customer is King".

Our main products include: barreled drinking water production line, small bottle drinking water filling production line, effervescent beverage filling production line, tea and fruit juice hot filling production line, water treatment equipment, effervescent pop can beverage production line, glass bottle filling equipment, auxiliary equipment, nonstandard equipment surveying and mapping, as well as design, reconstruction and whole-plant engineering service.

Our users spread over more than 20 provinces, municipalities and autonomous regions throughout China. Furthermore, our products are also exported to Japan, Mid East, Southeast Asia, South Africa, Russia, the Commonwealth of the Independent States, and other countries and regions. In addition to producing and selling equipment, our company also provides various technical services, helps users to carry out equipment plane layout design, answers technological consultation of users, provides users with technical training for personnel and operation guidance, etc.



生产车间

PRODUCTION WORKSHOP

严格的车间现场管理，实行6S定置规定，遵守各项操作规程，安全生产，不断加强核心技术的研发和创新，不断追求卓越，精益求精，以先进的生产设备，严格的质量管理，精密的生产检测流程，保证每一款产品的优良性能。

Strict on-site management of the plant, the implementation of 6S set regulations, to comply with the operating procedures, production safety, and constantly strengthen the core technology research and development and innovation, continuous pursuit of excellence, excellence, advanced production equipment, strict quality management, precision production testing Process, to ensure that each of the excellent performance of a product.



规模化的生产
铸就企业实力和品牌
LARGE-SCALE MANUFACTURING
CREATES ENTERPRISE STRENGTH AND BRAND



雄厚的技术
精良的装备
POWERFUL TECHNOLOGY
FINE EQUIPMENT

装配调试与装备
**ASSEMBLY, COMMISSIONING
AND EQUIPMENT**



市场竞争的基础，离不开生产实力，离不开完善先进的硬件设施和先进的管理理念。深知硬件和软件的重要性，在同行业率先引进国内外先进生产设备和ISO9001质量管理体系认证，以国际化的生产设施和管理理念生产出符合国际标准的高端优质产品，完全满足并引领工业现代化的需求。

Market competition is closely associated with production strength, perfect and advanced hardware facilities as well as advanced management concepts. Deeply understanding the importance of hardware and software, Xinmeiyuan took the lead among its peers in introducing advanced production equipment at home and abroad and ISO9001 quality management system, so as to produce high quality products conforming to international standards with international production facilities and concepts and fully meet the requirements for industrial modernization.

销售网络
SALES NETWORK



广大忠实的客户，是新美源赖以生存的基石。“诚实、守信、开拓、进取”是新美源公司信奉的营销理念，与客户共同进步则是我们追求的目标。多年来，本公司始终坚持灵活多样的市场营销策略，积极开展以客户为中心的市场营销策划工作，实施地区销售战略。公司凭借雄厚的实力、良好的信誉、严格的质量管理以及优质的服务体系，产品已远销至美国、菲律宾、柬埔寨、马来西亚、伊朗、巴基斯坦、印度、泰国、埃及、智利、沙特阿拉伯、叙利亚、南非、越南、朝鲜、俄罗斯等世界各地，并在国内各地建立了广泛的客户网络，逐渐赢得了广大用户的一致认可。

Faithful customers are the base for Xinmeiyuan to survive. "Being sincere, faithful, pioneering and enterprising" is the operation concept Xinmeiyuan always abides by, and it is our goal to seek for mutual progress with customers. Over the years, by consistently adhering to diversified marketing strategies, our company is actively developing marketing activities revolving around customers and executing the regional sales strategy. Thanks to our powerful strength, good reputation, strict quality management and excellent service systems, our products have been exported far to USA, the Philippines, Cambodia, Malaysia, Iran, Pakistan, India, Thailand, Egypt, Chile, Saudi Arab, Syria, South Africa, Vietnam, Korea, Russia, etc. and won wide recognition from users while extensive customer networks have been established in China.



真诚服务、赢得信赖
立足于市场、服务于市场
WINNING TRUST THROUGH SINCERE SERVICE
FINDING A FOOTHOLD IN THE MARKET AND SERVING THE MARKET



企业资质 ENTERPRISE HONORS

诚信构建和谐 诚信取得荣誉

SINCERITY CONSTRUCTS
HARMONY AND WINS HONORS

多年来，新美源秉承“诚信、品质、服务”的经营理念，已通过严格的ISO9001国际质量体系认证，并荣获多项殊荣，得到了社会各界的认可，给未来的发展创造了更多的机遇。


Over the years, by adhering to the business philosophy of "sincerity, quality and service", Xinmeiyuan has been certified to the ISO9001 international quality system. We have also won many honorable titles, receiving recognition from people of all circles and creating more opportunities for our future development.



目录 CONTENTS

- 16 CCGF 瓶装饮用水灌装线
BOTTLED DRINKING WATER FILLING LINE
- 18 DCGF 碳酸饮料灌装线
CARBONATED BEVERAGE FILLING LINE
- 19 RCGF 系列热灌装线
HOT FILLING LINE
- 20 GXGF 系列果肉混合灌装线
PULP MIXING AND FILLING LINE
- 21 ZXGF 系列中温灌装线
MEDIUM TEMPERATURE FILLING LINE
- 22 TXGF(T) 系列玻璃瓶热灌装线
GLASS BOTTLE HOT FILLING LINE
- 23 WJG 系列无菌冷灌装线
ASEPTIC COLD FILLING LINE
- 24 DXGF(T) 系列玻璃瓶碳酸饮料灌装线
GLASS BOTTLE CARBONATED BEVERAGE FILLING LINE
- 25 GF 系列高精度定量灌装线
HIGH PRECISION RATIONED FILLING LINE
- 26 DGC 灌装封罐机组
FILLING AND CAN SEAMING UNIT
- 27 DGJ 高速浓酱灌装封罐机
HIGH SPEED THICK SAUCE FILLING AND CAN SEAMING MACHINE
- 28 WYH 系列混合机
MIXING MACHINE
- 29 LP 系列理瓶机
SERIES BOTTLE UNSCRAMBLER
- 30 水处理设备
WATER TREATMENT EQUIPMENT
- 36 桶装水灌装成套设备
BARRELED WATER WHOLE-SET FILLING EQUIPMENT
- 40 自动桶装生产线
AUTOMATIC BARRELED WATER PRODUCTION LINE
- 42 桶装水灌装成套设备
BOTTLED WATER FILLING EQUIPMENT
- 46 调配系统
DEPLOYMENT SYSTEM
- 47 调配罐
PREPARE TANK
- 48 自动就地清洗系统
AUTOMATIC CIP CLEANING SYSTEM
- 49 杀菌机
STERILIZATION MACHINE
- 50 DPL 倒瓶杀菌机
BOTTLE INVERSE STERILIZER MACHINE
- 51 PLJ 喷淋冷却隧道
SPRAY COOLING TUNNEL
- 52 套标机贴标机 SLEEVE LABELING MACHINE & ADHESIVE LABELING MACHINE
- 52 全自动旋转式热熔胶贴标机
ROTARY HOT MELT GLUE LABELING MACHINE
- 53 BS 系列全自动热收缩包装机
FULL AUTO HOT SHRINKING PACKAGE MACHINE
- 53 机器人装箱、码垛机
ROBOT (PACKING, PALLETIZING)
- 54 MX 系列旋转式吹瓶机
ROTARY TYPE BLOWING MACHINE
- 55 SY 系列直线式吹瓶机
LINEAR TYPE BLOWING MACHINE
- 56 矿泉水纯净水工艺流程图
MINERAL WATER AND PURE WATER GLOW CHART
- 57 碳酸饮料工艺流程图
CARBONATED BEVERAGE PROCESS FLOW CHARAT
- 58 果汁饮料供应工艺流程图
FRUIT JUICE BEVERAGE SUPPLY PROCESS FLOW CHART

C(CGF) 瓶装饮用水灌装线
BOTTLED DRINKING WATER FILLING LINE

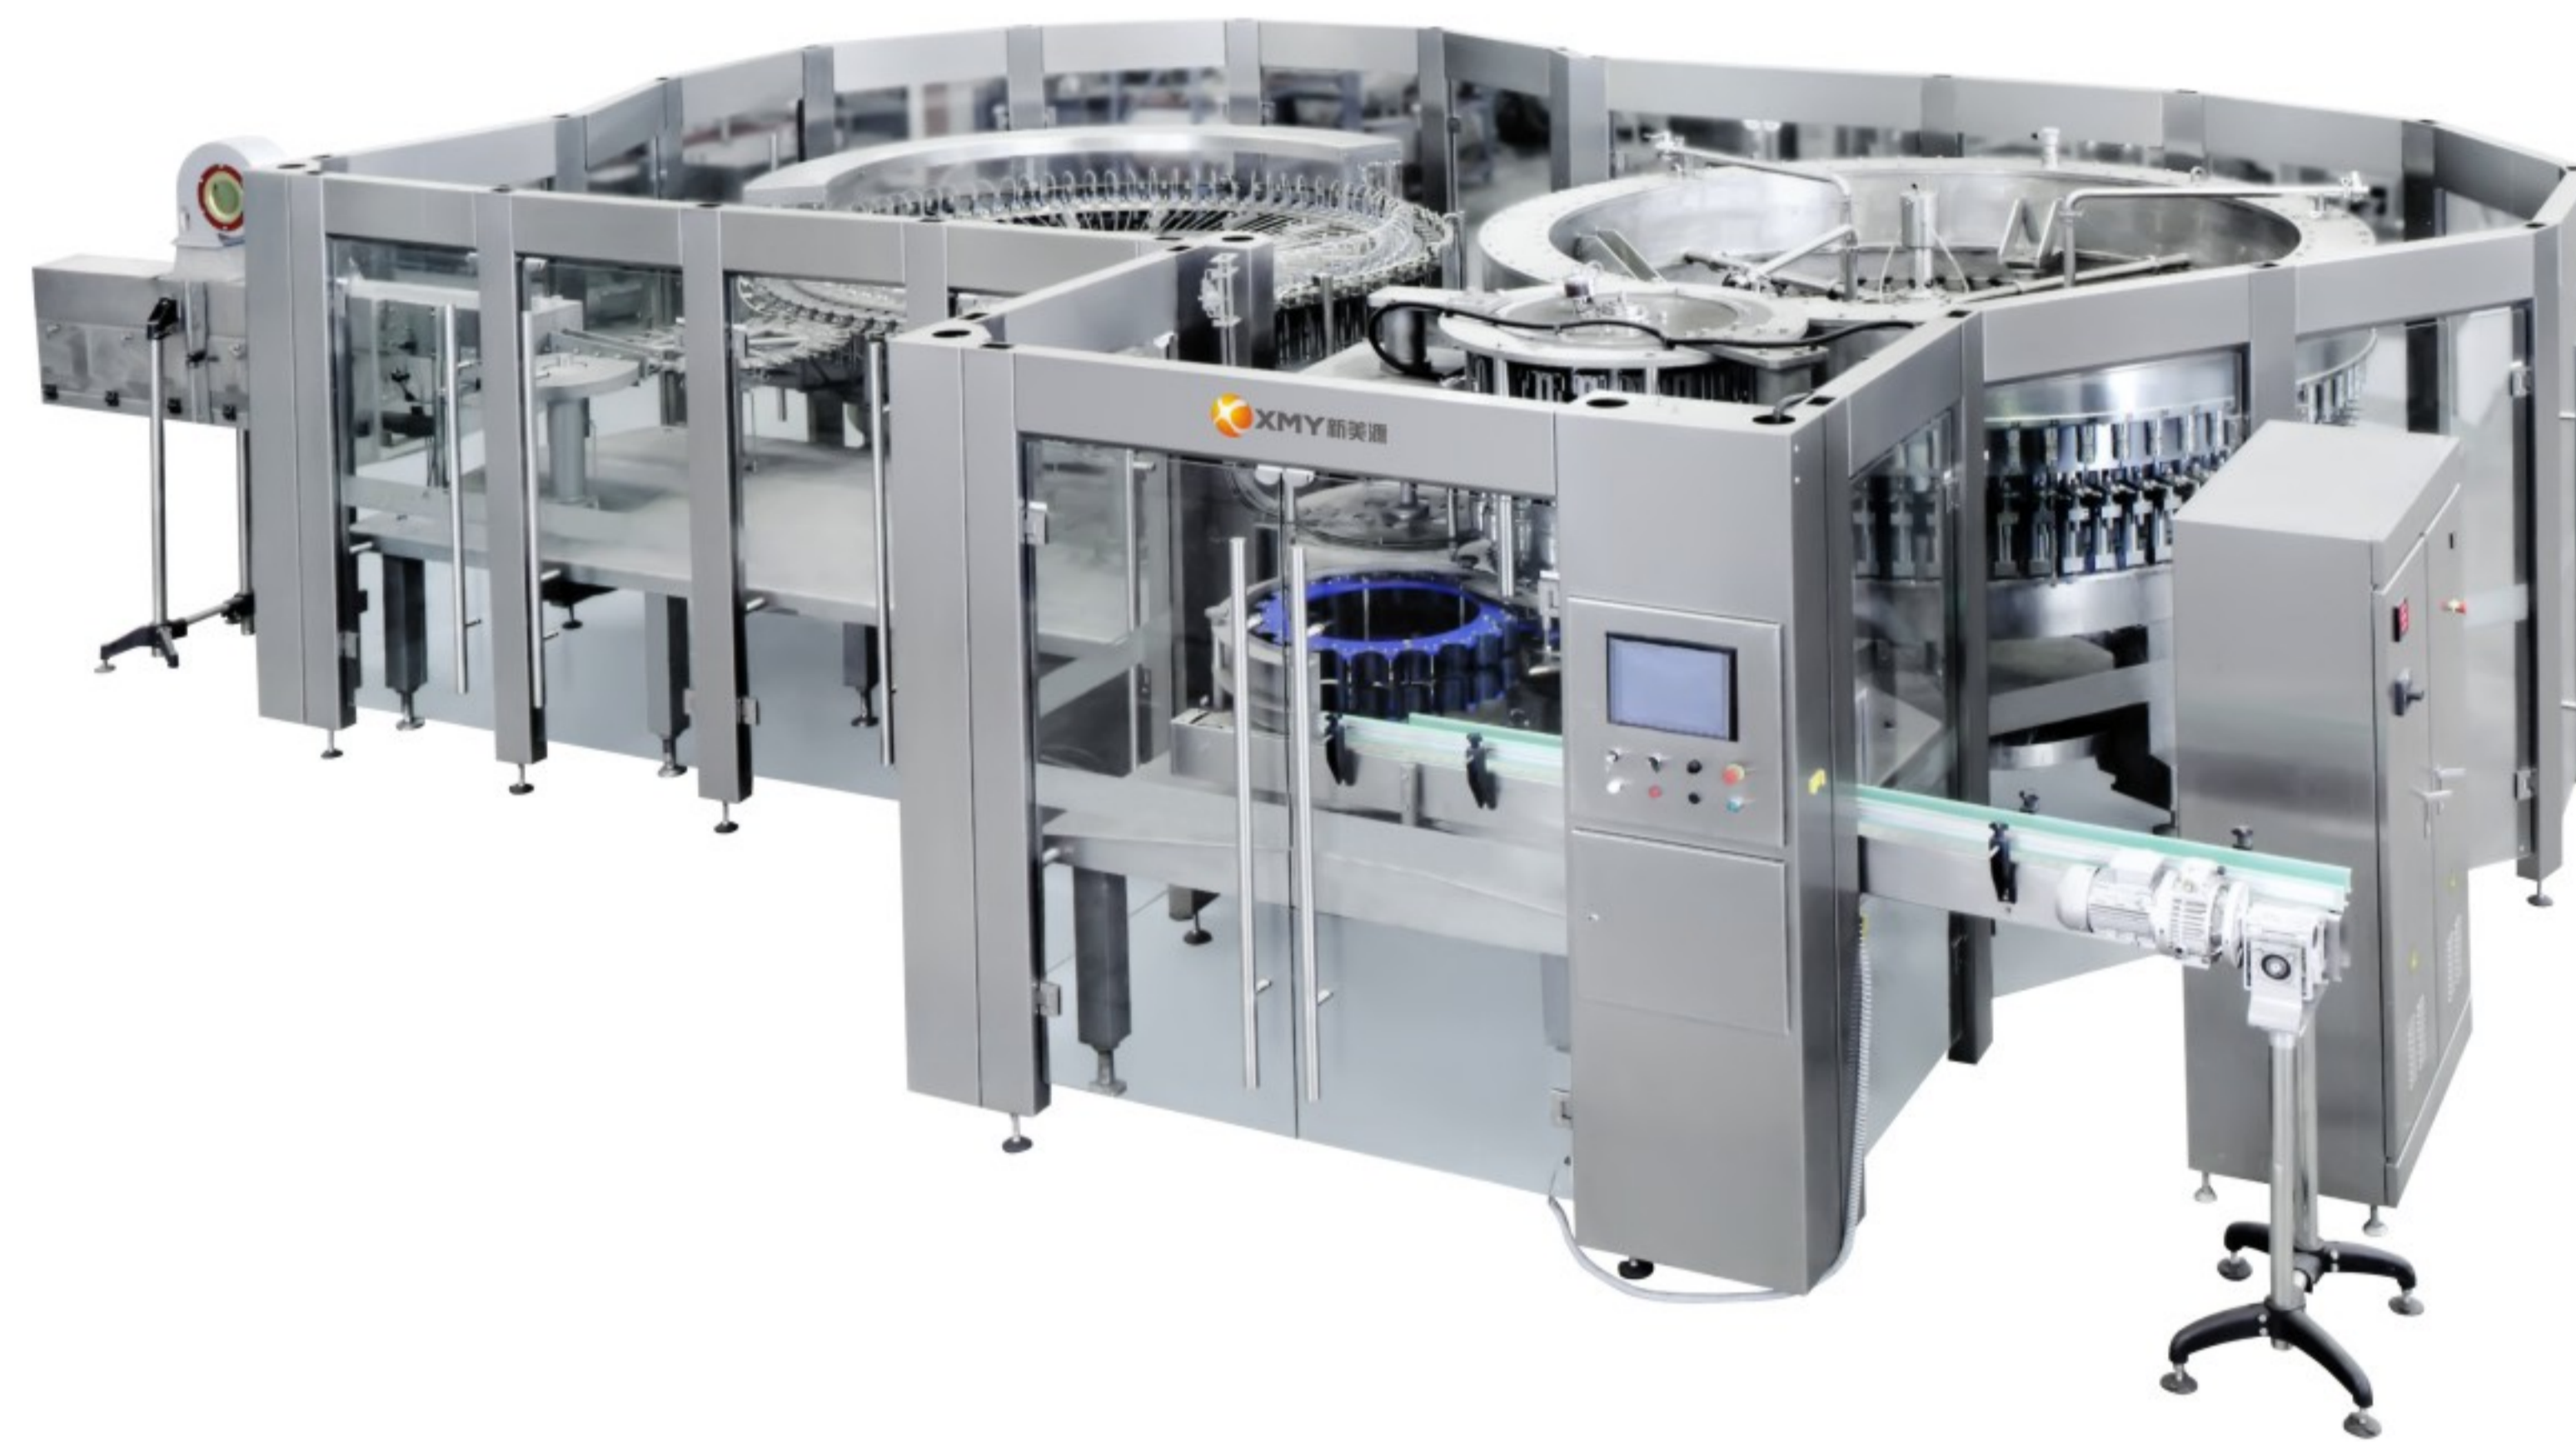

用于纯净水、矿泉水等不含气饮料生产的CGF、CCGF三合一、四合一系列、产量5000-48,000瓶/小时，可供用户选择。

CGF, CCGF series apply to the production of non-carbonated drink as pure water and mineral water, with optional capacity from 5000BPH to 48,000 BPH.



主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	CGF18/18/6	CGF24/24/8	CGF32/32/8	CGF40/40/10	CGF50/50/15	CGF60/60/15	CGF72/72/18	CGF80/80/22
冲瓶1头数 Rinsing head 1	18	24	32	40	50	60	72	80
冲瓶2头数 Rinsing head 2	18	24	32	40	50	60	72	80
灌装头数 Filling head	18	24	32	40	50	60	72	80
封口头数 Sealing head	6	8	8	10	15	15	18	22
生产能力 Capacity	6000BPH	12000BPH	15000BPH	18000BPH	24000BPH	30000BPH	36000BPH	42000BPH
外形尺寸 Dimension	2850 × 2150 × 2750	2880 × 2180 × 2750	3380 × 2580 × 2750	4430 × 3280 × 2750	4720 × 3550 × 2750	6000 × 5450 × 2750	6500 × 4680 × 2750	7800 × 6380 × 2750
装机容量 Installed capacity	2.2KW	2.2KW	3KW	7.5KW	7.5KW	11KW	15KW	19KW

DCGF 碳酸饮料灌装线
CARBONATED BEVERAGE FILLING LINE



用于含碳酸饮料生产的DCGF、DGF系列，产量3000-30000瓶/小时可供用户选择。

DCGF, DGF series apply to the production of carbonated drink, with optional capacity from 3,000BPH to 30,000BPH.



主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	DCGF12/12/5	DCGF18/18/6	DCGF24/24/8	DCGF32/32/8	DCGF40/40/10	DCGF50/50/12	DCGF60/60/15	DCGF72/72/18
冲瓶头数 Rinsing head	12	18	24	32	40	50	60	72
灌装头数 Filling head	12	18	24	32	40	50	60	72
封口头数 Sealing head	5	6	8	8	10	12	15	18
生产能力 Capacity	3500BPH	5000BPH	8000BPH	12000BPH	15000BPH	18000BPH	21000BPH	28000BPH
外形尺寸 Dimension	2360 × 1770 × 2700	2760 × 2060 × 2700	2800 × 2230 × 2700	4215 × 2960 × 2700	4360 × 3300 × 2700	5900 × 3300 × 2700	5770 × 5288 × 2700	6540 × 4900 × 2700
装机容量 Installed capacity	1.5KW	2.2KW	3KW	4KW	7.5KW	7.5KW	11KW	11KW



RCGF 系列热灌装线
HOT FILLING LINE



用于茶、果汁饮料等生产的RCGF、RCCGF三合一、四合一热灌装系列、产量3000-36000瓶/小时可供用户选择。

RCGF 3-in-1 Unit and RCCGF 4-in-1 Unit applies to the production of tea and juice, with optional capacity from 3,000 BPH to 36,000 BPH.



主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	RCGF12/12/5	RCGF18/18/6	RCGF24/24/8	RCGF32/32/8	RCGF40/40/10	RCGF50/50/12	RCGF60/60/15	RCGF72/72/18
冲瓶头数 Rinsing head	12	18	24	32	40	50	60	72
灌装头数 Filling head	12	18	24	32	40	50	60	72
封口头数 Sealing head	5	6	8	8	10	12	15	18
生产能力 Capacity	3500BPH	5000BPH	8000BPH	12000BPH	15000BPH	18000BPH	21000BPH	28000BPH
外形尺寸 Dimension	2360 × 1770 × 2700	2760 × 2060 × 2700	2800 × 2230 × 2700	4215 × 2960 × 2700	4360 × 3300 × 2700	5900 × 3300 × 2700	5770 × 5288 × 2700	6540 × 4900 × 2700
装机容量 Installed capacity	1.5KW	2.2KW	3KW	4KW	7.5KW	7.5KW	11KW	11KW

GXGF 系列果肉混合灌装线
PULP MIXING AND FILLING LINE



GXGF系列浓汁灌装四合一机为全自动消毒、冲瓶、灌装、封盖一身、适用于各种果蔬酱、调味酱、颗粒饮料、果汁等酱类与低泡沫体物料定量灌装，亦可以用作植物油、日用化妆品、高浓度乳制品、乳化液农药定量灌装的生产设备、可以进行常温或低温灌装。此类系列化机型应用范围广、在国内属于独创、技术含量处于领先地位。

The GXGF SERIES 4-in-1 MONOBLOCK is automatically sterilizing, washing (blowing dust), filling and capping machine. It can be used to fill all kinds of edible oil, high viscosity milk product, fruit drink with particles, garden spared stuff catsups (such as juice) and low foaming liquid. Also it can fill cosmetic, pesticide, etc. The GXGF SERIES 3-in-1 MONOBLOCK adopt advanced technology can be widely used in different fields.



ZXGF 系列中温灌装线
MEDIUM TEMPERATURE FILLING LINE



中温灌装技术，就是用普通聚酯（PET）瓶在 $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 的温度下进行茶饮料、果汁饮料的灌装，在不添加任何防腐剂的条件下，产品达到保质期的要求，产量5000-36000瓶/小时可供用户选择。

Moderate temperature filling technology adopts normal PET bottle and fills tea drinks and juice at $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$. products can reach the requirement of shelf life without any preservatives. The capacity ranges from 5,000BPH to 36,000BPH.



TXGF(T) 系列玻璃瓶热灌装线
GLASS BOTTLE HOT FILLING LINE



用于茶、果汁饮料等生产的TXGF(T)三合一、四合一热灌装系列，产量5000-36000瓶/小时可供用户选择。

TXGF(T) 3-in-1 and 4-in-1 unit applies to the production of tea and juice, with optional capacity from 5,000BPH to 36,000BPH.



WJG 系列无菌冷灌装线
ASEPTIC COLD FILLING LINE



无菌冷灌装是指在无菌条件下对饮料产品进行冷（常温）灌装，这是相对于通常采用在一般条件下进行的高温热灌装方式而言的。在无菌条件下灌装时，设备上可能会引起饮料发生微生物污染的部位均保持无菌状态，所以不必在饮料内添加防腐剂，也不必在饮料灌装封口后再进行后期杀菌，就可以满足长货架期的要求，同时可保持饮料的口感、色泽和风味。

Aseptic cold filling refers to the cold (room temperature) filling of a beverage product under aseptic conditions, as opposed to a high temperature hot filling process which is generally carried out under normal conditions. In the sterile conditions of filling, the equipment may cause microbial contamination of beverage parts are kept sterile, so do not have to add preservatives in the beverage, do not have to seal the beverage filling and then post-sterilization, you can To meet the requirements of long shelf life, while maintaining the taste of the beverage, color and flavor.



DXGF(T) 系列玻璃瓶碳酸饮料灌装线
**GLASS BOTTLE CARBONATED
 BEVERAGE FILLING LINE**



用于含汽碳酸饮料生产的DXGF(T)系列，产量3000-30000瓶/小时可供用户选择。

DXGF(T) series applies to the production of carbonated beverage, capacity ranges from 3,000BPH to 30,000BPH.




GF 系列高精度定量灌装线
**HIGH PRECISION RATIONED
 FILLING LINE**



GF系列二合一灌装机集全自动灌装、封盖于一身，适用于各种食用油、果汁、调味品等产品。本系列产品采用电子计量方式和专用流体部件实现低泡沫定量灌装，可实现各种温度状态下的非接触灌装。采用了ALCOA旋盖技术，可进行全方位泡沫清洗。产量由3000到40000瓶/小时可供用户选择。

GF series 2-in-1 filling machine is automatic filling and capping. It is suitable for all kinds of edible oil, juice, seasoning etc. This series products apply electronic measuring mode and special liquid component to realize low foam volumetric filling and can realize non-contact filling under all temperature condition. Adopt ALCOA capping technology to realize full direction COP cleaning. Production varies from 3000BPH to 40,000BPH.

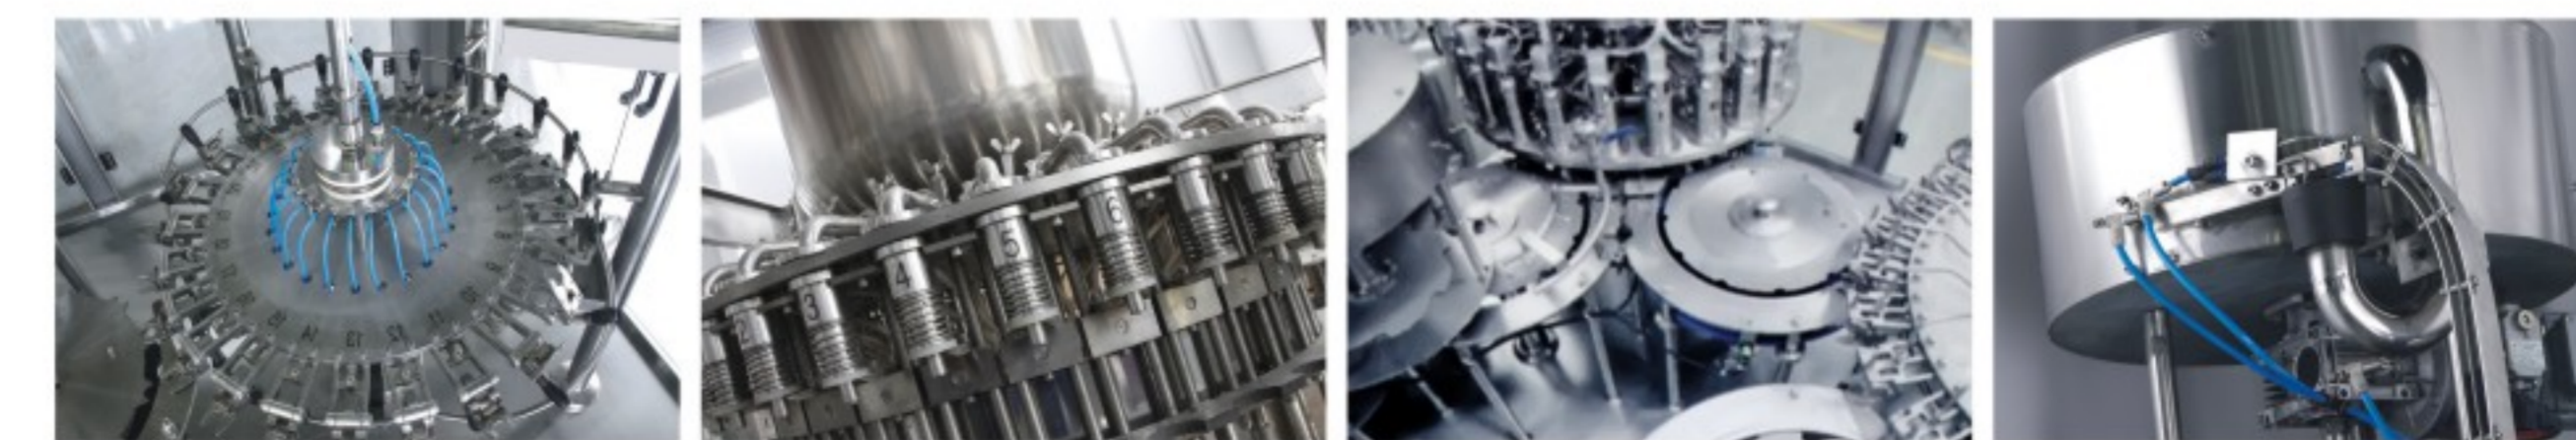

DGC 灌装封罐机组 FILLING AND CAN SEAMING UNIT



我公司根据国内大、中型罐厂、饮料厂实际情况，参照国外最先进的灌装、封罐同类产品而设计制造的新一代灌装、封罐组合机。采用无罐身接触的气动控制自动下盖，采用等液面灌装技术，生产能力为变频调速，95%以上外观材料为的不锈钢，保证了整机的美观和卫生要求。为提高罐内真空度，可按客户要求配置蒸汽喷射装置。

主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	DGC1204A	DGC1804A
封罐头数 Can seaming head	4	4
灌装头数 Filling head	12	18
生产能力 Production capacity	30~170cans/min	30~250cans/min
适用罐径 Applicable can diameter	Φ52.5~99mm	Φ52.5~99mm
适用罐高 Applicable can height	39~160mm	39~160mm
功率 Power	5.5kw	5.5kw
重量 Weight	3100kg	3800kg
外形尺寸 Dimension	2850 × 1500 × 1900mm	3050 × 1750 × 1900mm

According to actual situations in domestic large and medium-sized canning factories and beverage plants, our company has designed and manufactured a new generation of filling and can seaming combination machine by referring to the most advanced similar filling and can seaming products in the world. The pneumatically controlled lid feeding without can body contact and the equal liquid level filling technology are adopted. Variable frequency speed control is adopted for production. More than 95% of the appearance materials are made of stainless steel to guarantee the requirements of beautiful appearance and sanitation of the whole machine. The steam jetting device can be allocated according to customer requirements to increase the vacuum degree in the can.



DGJ 高速浓酱灌装封罐机 HIGH SPEED THICK SAUCE FILLING AND CAN SEAMING MACHINE



本机采用活塞灌装原理，空罐经输送到达灌装位置后，压缩空气经气动三联件进入气缸，把灌装阀打开，活塞在凸轮的作用下在活塞缸内向下移动进行灌装，待灌装完毕后灌装阀在气缸的作用下自动关闭，活塞缸再进行吸料。灌好的罐子经出罐后被同步运转的钩子链送到封口机上进行封口。当封罐机的托罐机构升起托罐盘后，压头压住盖子，两道滚轮分别在凸轮的作用下对罐进行预封和实封。封好后的罐在出罐拨轮的作用下送到出罐输送带上。

The machine adopts the piston filling principle. After the empty can is conveyed to the filling position, the compressed air will enter the cylinder after passing through the pneumatic triplet to turn on the filling valve. Under the action of the cam, the piston will move downwards in the piston cylinder to carry out filling. After the filling is finished, the filling valve will be automatically closed under the action of the cylinder. The piston will carry out material suction. After discharged, the filled can will be conveyed by the hook chain that runs synchronously to the sealing machine for sealing. After the can supporting mechanism of the can seaming machine raises the can supporting disc, the chuck will press the lid, and the two rollers will respectively carry out pre-sealing and real sealing of the can under the action of the cam. The sealed can will be conveyed to the can discharging conveyor belt under the action of the can discharging pushing wheel.

主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	DGJ1204	DGJ2406	DGJ3608
封罐头数 Can seaming head	4	6	8
灌装头数 Filling head	12	24	36
适用罐高 Applicable can height	39~160mm	39~160mm	39~160mm
适用罐径 Applicable can diameter	Φ52~99mm	Φ52~99mm	Φ52~73mm
灌装容量 Filling capacity	70~850g (目前三种缸径)	70~850g (目前三种缸径)	70~450g (目前三种缸径)
生产能力 Production capacity	80~200(b/min) (与灌装量等有关)	80~400b/min (与灌装量有关)	80~600b/min (与灌装量有关)
电机功率 Power	5.5kw	7.5kw	11kw
重量 Weight	4000kg	5800kg	6880kg
外形尺寸 Dimension	2800 × 1600 × 1900mm	3214 × 2104 × 1900 mm	3650 × 2150 × 2200 mm

WYH 系列混合机 MIXING MACHINE



用于含汽碳酸饮料混合的WYH系列，产量2-15吨/小时可供用户选择，二氧化碳含气倍数:3.8-4.5。

WYH series applies to the mixing of carbonated drink, with optional capacity from 2t/hr to 20t/hr, CO2 content: 3.8-4.5



主要技术参数 MAIN TECHNICAL PARAMETERS

生产能力 (范围) Production capacity (range)		3-25 t/h
水、糖浆的混合比范围 Mixing ratio range of water and syrup		3:1-10:1
产品含气量 (范围) Product gas content (range)		2.5-4.5 倍
成品温度 Finished product temperature		4-7°C
设备工作条件 (标准供给) Equipment working condition (standard supply)	(1) 饮料水 (净化水) Beverage water (purified water)	0.20-0.25MPa, 常温(Normal temperature)
	(2) 糖浆 (或果汁等) Syrup (or fruit juice, etc.)	0.10-0.15MPa, 常温(Normal temperature)
	(3) 碳酸气 (CO2) Carbonic acid gas (CO2)	0.8-1.0MPa
	(4) 压缩空气 Compressed air	0.6-0.8MPa
	(5) 冷媒 (冰水) Refrigerant (ice water)	0.20-0.30 Mpa, -1-0°C

LP 系列理瓶机 SERIES BOTTLE UNSCRAMBLER



LP系列每小时8000瓶-36000瓶理瓶机，是高速灌装机必备之配套产品，用机械动作来完成塑料瓶从零乱上瓶至有序排瓶至灌装机风送道，可以满足灌装机全自动生产需要。

LP Series 8000 bottles per hour -36000 bottles bottle machine, is a high-speed filling machine necessary ancillary products, with mechanical action to complete the plastic bottle from the chaotic bottle to the orderly row of bottles to the filling machine to the wind channel, to meet Filling machine fully automatic production needs.



水处理设备

WATER TREATMENT EQUIPMENT



多介质过滤器
Multi-media filter

采用高镍304不锈钢、进行无缝焊接、内外抛光处理达到卫生级标准、并且内部填充优质石英砂、自上而下利用深层过滤原理去除水中的悬浮物、胶体等有害物质。

High-nickel 304 stainless steel, seamless welding, internal and external polishing to achieve health-class standards, and filled with high-quality quartz sand, top-down use of deep-water filtration principle to remove suspended solids, colloidal and other harmful substances.

活性炭过滤器
Activated carbon filter

卫生级水箱、内含优质活性炭、加上新美源专业研发的化学液或蒸汽消互手法、让活性炭过滤器不仅能够更好的吸附水中的余氯及有机物且不成为细菌的温床。

Sanitary water tank, containing high-quality activated carbon, with the TOPSTAR professional development of chemical liquid or steam elimination method, so that the activated carbon filter can not only better adsorption of chlorine in the water and surface material and not a hotbed of bacteria.



精密过滤器
Precision filter

规格：根据客户实际处理流量情况设计
阀门：卡箍式蝶阀
特点：具有设计合理，出水量大，清洗方便等特点。

Specification: designed according to actual flow conditions of customers
Valve: clamp type butterfly valve
Features: It has such features as reasonable design, high water discharge, convenient cleaning, etc.



反渗透设备
Reverse osmosis equipment

流量/规格: 根据客户实际处理流量情况设计
系统回收率: 根据客户要求70%以上
反渗透膜: 美国“DOW”公司


特点:

- 1、工艺流程简单、操作方便;
- 2、产品水质稳定、出水质量高;
- 3、设备装置结构紧凑、占地面积少;
- 4、运行维护和设备维修简单、方便;
- 5、可以从水中除去90%以上的溶解性盐类和99%以上的胶体、微生物及有机物等;
- 6、膜分离过程是清洁生产过程、不使用化学试剂、不排放再生废液、不污染环境。

Flow/specification: designed according to actual flow conditions of customers
System recovery ate: above 70%, as per customer requirements
Reverse osmosis membrane: USA "DOW" Company

Features:

1. Simple process flow and convenient operation;
2. Stable water quality and high water discharge quality;
3. The equipment has compact structure and small floor space;
4. Simple and convenient operating maintenance and equipment maintenance;
5. It can remove from water more than 90% of soluble salts and more than 99% of colloids, microbes, organics, etc.;
6. The membrane separation process is a clean production process without the use of chemical agents, without the emission of regenerated waster water and without pollution to the environment.

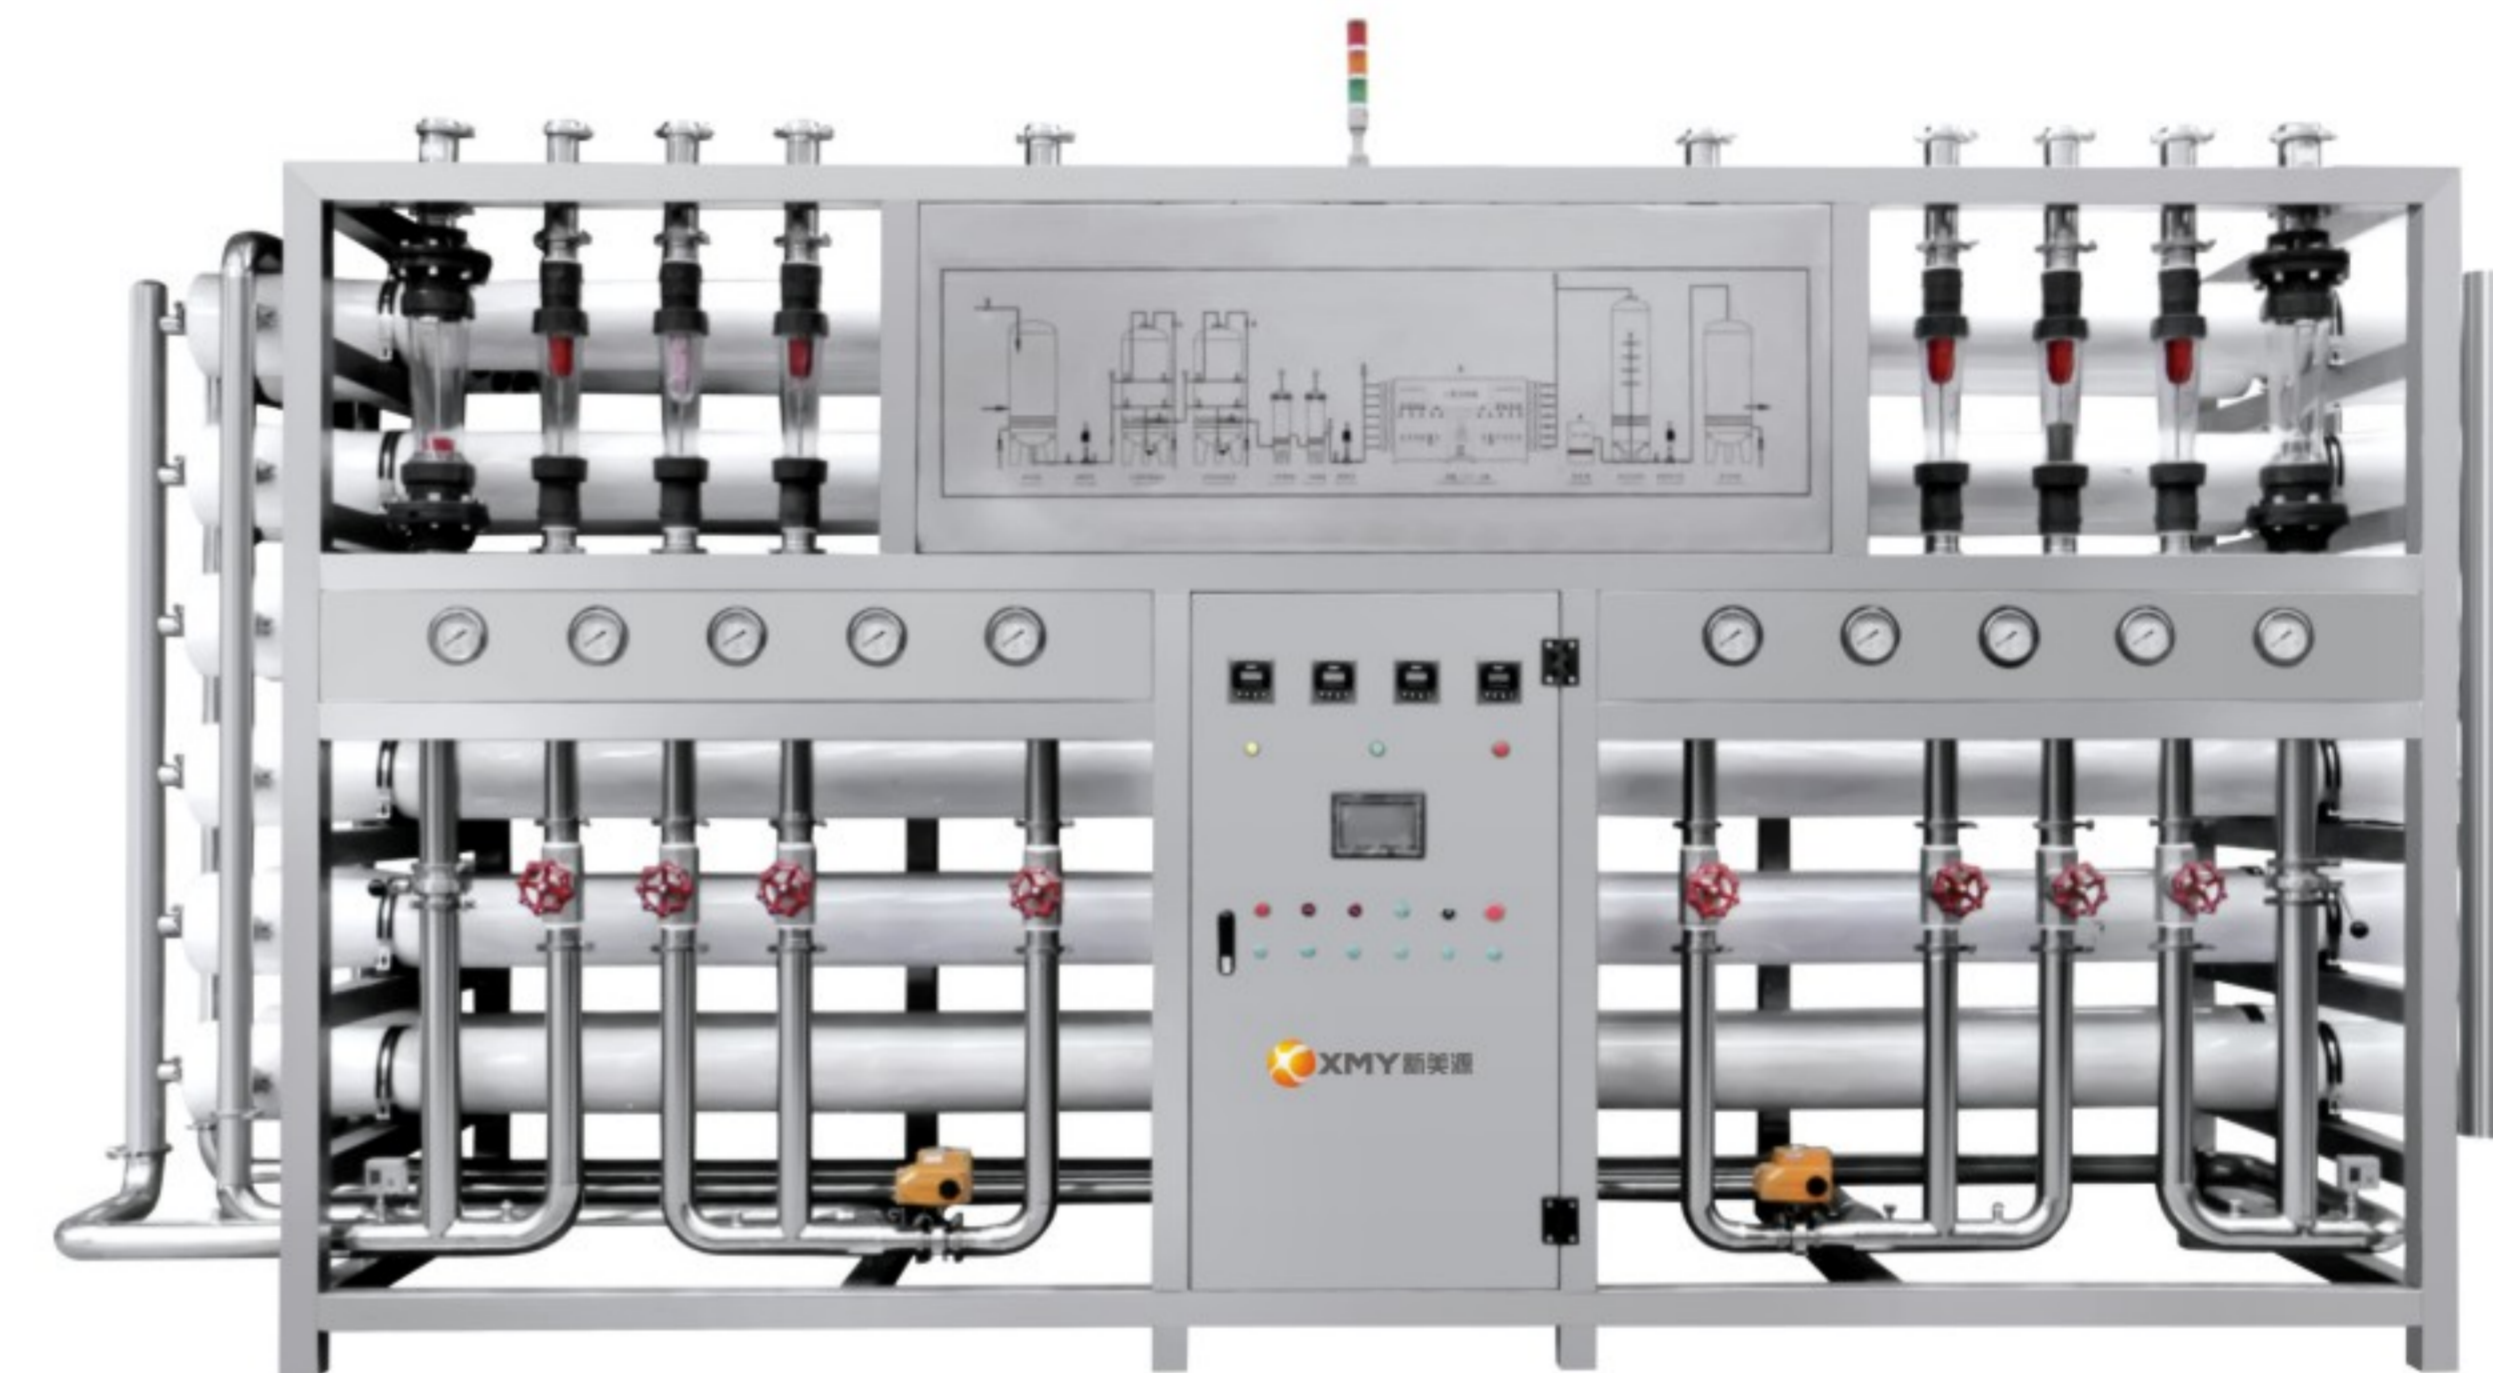

超滤设备
Ultrafiltration equipment

流量: 按客户要求与产量设计
系统回收率: 根据客户要求85%以上
反渗透膜: 美国“DOW”公司

特点:

- 1、过滤过程是在常温下进行、条件温和无成分破坏;
- 2、设备占地面积小, 易于模块化设计、扩展能力强;
- 3、分离过程仅以低压力为推动力、耗能少;
- 4、设备及工艺流程生简单、易于操作、管理及维修。

Flow: designed according to customer requirements and output
System recovery ate: above 85%, as per customer requirements
Reverse osmosis membrane: USA "DOW" Company

Features:

1. The filtration process is carried out at normal temperatures with mild conditions and without damage to ingredients.
2. The equipment takes small floor space with easy modular design and strong expansion capacity.
3. The separation process adopts low pressure as the driving power and consumes little energy.
4. The equipment process flow is simple with easy operation, management and mainten



紫外线消毒杀菌器
UV Sterilizer

用以消除可以在储槽、管道、离子交换处理后遗留在水中的细菌等微生物、以及消灭树脂床内滋生的细菌、饮水中细菌、对高纯水、瓶装水等不会产生副作用。

It can kill bacteria organics or residual bacteria and organics left by ion substitution. On top of that, it can exterminate bacteria in resin bed and bacteria and virus in drinking water. Most importantly, it will not cause any side effect when used in producing ultra-pure water, bottled water etc.

臭氧发生器及氧化系统
Ozone generator and oxidizing system

臭氧是一种强氧化剂和消毒剂、臭氧消毒反应快、投量少、在水中不产生持久性残留、无二次污染而适应能力强、在PH5.6-9.8、水温0-37℃的范围内、臭氧的消毒能力最佳。

该设备以空气（或氧气）为原料、用高压交流电进行无声放电生产臭氧，臭氧接触氧化系统采用先进的料塔固定混合或动态混合的方式，以达到最佳的优化效果。

应用于饮用水、矿泉水、纯净水、游泳水的消毒杀菌及污水厂水等氧化脱色除臭等领域。



Ozone is a kind of strong oxidizer and disinfectant. With quick disinfection reaction, low feeding volume, no persistent residues in water, no secondary pollution, strong adaptability, etc., ozone has the best disinfection capacity at PH5.6-9.8 and water temperatures of 0-37°C.

The equipment takes air (or oxygen) as the raw material, uses high voltage AC to carry out silent discharge for producing ozone. The ozone contacting and oxidizing system adopts the advanced material tower fixed mixing or dynamic mixing mode to achieve the best optimization effect.

It is applied for disinfection of drinking water, mineral water, purified water, swimming water and oxidation, decoloring and odor removing of water in pollution factories.



臭氧混合塔
Ozone mixing tower

特点

- 1、反应快、投量少、臭氧能迅速杀灭其它过滤器不能除去的细菌、芽孢、病、毒、且很低的浓度时既有杀菌灭活作用；
- 2、在水中不产生持久性残留、臭氧分解为氧气、无二次污染；
- 3、能有效破坏水中有机物、改善水的物理性质和器官感觉、而又不改变水的自然性质；
- 4、精心设计、使臭氧混合充分、达到臭氧浓度各种位的均衡；
- 5、独特的浓度控制、以保证臭氧浓度保持在有效的范围内；
- 6、占地小、维护简便。

Features

1. With quick reaction and low feeding volume, ozone can quickly kill bacteria, spores and viruses that cannot be removed by other filters. It has sterilization and inactivation effects when the concentration is very low.
2. It does not produce persistent residues in water. Ozone is decomposed into oxygen without secondary pollution.
3. It can effectively damage organics in water and improve physical properties of water and organ sensation for water without changing the natural quality of water.
4. The elaborate design sufficiently mixes ozone and realizes balanced ozone concentrations at all parts.
5. The unique concentration control ensures ozone concentrations are maintained within an effective range.
6. It takes small floor space with convenient maintenance.

无菌储水箱
Aseptic water storage tank

特点：

- 1、根据客户实际情况，量身订做；
- 2、防腐、耐用、成本低、使用寿命长；
- 3、科学的焊接，不留污染源、且保证美观；
- 4、清洗方便、有排污装置、不滋生真菌、绝不生锈。

Features:

1. Tailored according to actual conditions of customers;
2. Anticorrosion, good durability, low costs and long service life;
3. Scientific welding, without pollutant sources, ensuring beautiful appearance;
4. Convenient cleaning, provided with blowdown device, without fungal breeding and rust.



桶装水灌装成套设备

BARRELED WATER WHOLE-SET FILLING EQUIPMENT



拔盖机 Lid puller

特点:

- 1、合理的设计不伤瓶口，自动调节拔盖速度，动作准确；
- 2、设备根据客户产量情况设计为单头、双头、多头等，速度从200-3000个/小时或更多不等；
- 3、设计科学、运动灵活，气动复位快速准确，拔盖装置可根据实际情况现在调度、结构简单，工作部分磨损小，具有稳定可靠，易于操作的特点。

Features:

1. Thanks to the reasonable design, the bottle mouths are not damaged. The lid pulling speed is automatically adjusted with accurate action.
2. The equipment can be designed with single head, double heads or multiple heads according to the output of customers, with the speed varying within 200-3000 pieces/hour or higher.
3. With scientific design, flexible movement, fast and accurate pneumatic resetting, the lid pulling device can be adjusted at the site according to actual conditions. It has such features as simple structure, low wear at the working part, good stability and reliability, easy operation, etc.



外刷桶机 External barrel brushing machine

特点:

- 1、根据客户实际情况设计不同型式，自动化程度高，PLC控制；
- 2、仿桶形毛刷不伤瓶，对瓶颈、瓶身、瓶底进行全方位洗刷；
- 3、整机封闭无外泄，有效解决了传统工艺中内、外洗涤液交叉污染的问题；
- 4、精心合理的毛刷与喷淋头的整体配合式布局，让桶洗涤更干净、更彻底。

Features:

1. According to actual conditions of customers, different types with high automation degree and PLC control are designed.
2. The barrel-imitation type brush carries out all-round washing and brushing of bottle neck, bottle body and bottle bottom without damaging the bottle.
3. The whole machine is sealed without leakage, so that the problem of cross contamination of internal and external washing liquids is effectively solved.
4. The elaborate and reasonable overall coordination layout of brush and spray head makes the cleaning of barrels more thorough.



桶装水灌装成套设备
**BARRELED WATER WHOLE-SET
 FILLING EQUIPMENT**



内冲洗主机
 Internal washing machine

特点:

- 1、瓶嘴均用特殊控制方法进行清洗。使主要部位保证彻底清洗，杜绝隐患、冲洗死角；
- 2、不同工位配备有电加热，方便客户选用；
- 3、洗涤剂均配备有电加热，方便客户选用；
- 4、加热水箱完全使用高温材料，并配有液位检测及温控检测报警控制装置及高温洗涤剂快速回收装置，可明显的减少热量的散失，降低运行的成本；
- 5、有机内热气抽风装置预备接口，可快速有效地降低机内雾气的浓度，提高了电子检测的精度；
- 6、伸入式旋转内洗喷头伸入桶内进行360°无死角冲洗，清洗点遍布桶内各个角落，以保证洗桶效果，提高产品质量；
- 7、为防止外洗清洗液残留的不锈钢喷头；
- 8、所有喷头均可方便更换，防堵；
- 9、所有管线、接头、阀门焊口等工艺、配件的严格把关与选材，充分突显了对品质的苛求式的精益求精。

1. The bottle mouths are cleaned by adopting special control methods. The main parts are ensured to be cleaned thoroughly, the hidden dangers are prohibited and dead corners are washed.
2. Different work stations are provided with electric heating to make it convenient for customers to select.
3. The washing liquids are provided with electric heating to make it convenient for customers to select.
4. The heating water tank is completely made of high temperature materials, and is equipped with liquid level detector, temperature detection, alarm and control device and high temperature washing liquid fast recovery device to obviously lower heat loss and reduce running costs.
5. The machine is provided with preparatory connection of hot air exhauster to rapidly and effectively reduce the concentration of fog inside the machine and increase the precision of electronic detection.
6. The stretching type rotary internal washing nozzle can be stretched into the barrel for 360° washing free of dead corners. The cleaning spots are covered at all corners in the barrel, so as to ensure the barrel washing effect and improve product quality.
7. The stainless steel nozzles can prevent the residues of external washing liquids.
8. All nozzles can be conveniently replaced and prevented from blocking.
9. The processes and fittings for all pipelines, connectors, valve welded joints are subject to strict control and material selection, which fully represents the spirit of keeping improving towards quality.

灌装机
 Filling machine

特点:


- 1、经典旋转式灌装方式设计、采用恒压与时间灌装原理。通过压力装置控制、变频调整灌装压力。同时、各灌装阀所独立微调阀门、保证灌装容量的一致性。彻底无溢流；
- 2、灌装速度变频可调、液位精确可控、无泄漏、确保优良灌装质量；
- 3、所有与产品水接触部分零件(包括灌装阀等)全部采用优质不锈钢AISI304或AISI316L等材料进行无死角镜面抛光、且易于清洗；
- 4、高品质电气元器件保证设备运行的精确性及稳定性。高精度的零部件制作保证设备的运行精度从而保证高品质的最终产品。材料费充分考虑产品食品卫生标准要求；
- 5、灌装阀全部为无死角设计、配有自动调心对准瓶口装置、保证次次精准；
- 6、精心的管线设计与细致入微的细节呈现、锤炼出非同一般的高品质定位。

1. It adopts classical rotary filling mode design and constant pressure and time filling principle. The filling pressure is controlled through the pressure device and adjusted through variable frequency. Meanwhile, all filling valves are provided with independent fine adjustment valves to ensure consistent filling volume. There is no overflow.
2. The filling speed is adjustable through variable frequency speed control. The liquid level is precisely controlled. There is no leakage and excellent filling quality is ensured.
3. All parts (including filling valves) that contact water are made of high quality stainless steel AISI304 or AISI316L, and are subject to mirror polishing free of dead corners with easy cleaning.
4. High quality electrical components ensure the running precision and stability of the machine. The high precision parts ensure the running precision of the equipment and thus ensure high quality final products. The materials give full consideration to the requirements in food hygiene standards.
5. The filling valve adopts the design free from dead corners. It is equipped with the device for automatic aligning with the bottle mouth to ensure precision at all times.
6. The elaborate pipeline design and the meticulous display of details represent extraordinary high quality orientation.

自动桶装生产线
**AUTOMATIC BARRELED WATER
 PRODUCTION LINE**



自动桶装线是专供水3加仑、5加仑桶装饮用水生产之用。整机集：冲洗、灌装、封盖功能于一体。是矿泉水、蒸馏水、纯净水生产的理想设备。整机采用优质不锈钢，防腐，易清洗。主要电气元件均采用SIEMENS、OMRON产品，气路系统采用进口AirTAC名牌产品。该机结构紧凑，占地厂房小，工作效率高且稳定可靠，自动化程度高。操作工仅需二人，是机电气三位一体的全自动桶装设备。

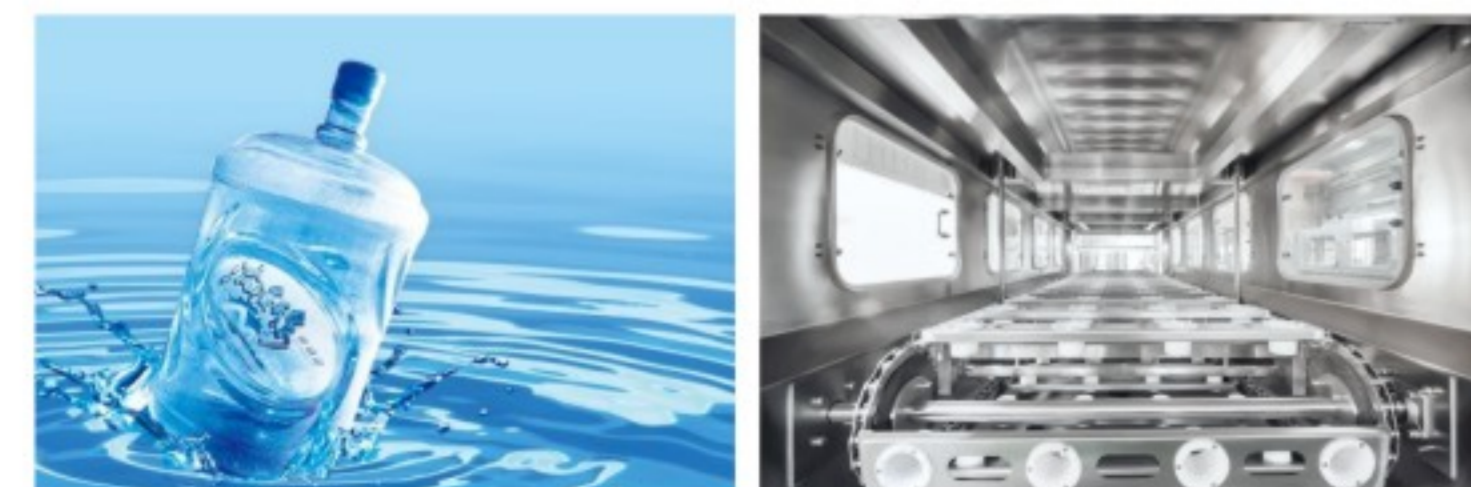

The automatic barreled water line is specially used for production of 3-gallon and 5-gallon barreled drinking water. The machine integrates the functions of rinsing, filling and capping. It is an ideal piece of equipment for production of mineral water, distilled water and purified water. The machine is made of high quality stainless steel with good anticorrosion and easy cleaning. The main electrical components are SIEMENS and OMRON products. The air way system adopts imported AirTAC brand products. The machine has such features as compact structure, small floor space, high work efficiency, good stability and reliability, high automation degree, etc. It only requires two operators and is a mechanically, electrically and pneumatically integrated automatic barreled water production machine.



桶装水灌装成套设备 BARRELED WATER WHOLE-SET FILLING EQUIPMENT

压盖机 Capping machine

特点:

- 1、链式压盖原理简单, 压盖连续性好;
- 2、对于高度不同的桶, 有主动式的弹力调节系统, 具有很高的包容性;
- 3、压盖密封效果好。

Features:

- 1 Chain gland principle is simple, gland continuity is good;
- 2 For a different height of the barrel, with active-style elastic adjustment system, with a high tolerance;
- 3 Gland sealing effect is good.



送盖洗盖机 Send cover washing machine

特点:

- 1、结构简单合理、上盖通顺无障碍;
- 2、气动式输送管道是顺畅的保障的重要设计。

Features:

- 1 The structure is simple and reasonable, the cover is smooth and accessible;
- 2 Pneumatic conveying energy channel is an important guarantee for the smooth design.



全自动套标机 Automatic bagging machine

特点: 连续自动套标, 提高工作效率, 减少人工成本和人为污染。

Features: With continuous and automatic bagging, it improves working efficiency and reduces labor costs and artificial pollution.

热收缩膜机 Heat shrinking machine

特点: 热收缩机温度连续可调、适合多种热缩膜、也可适应不同的速度、采用高热阻材料、保温性能好、能耗低。可选用蒸汽加热或电加热等不同加热方式。

Features: shrinking machine temperature continuously adjustable, suitable for a variety of thermal film, but also to adapt to different speeds, the use of high thermal resistance material, good insulation properties, low energy consumption. Can use steam heating or electric heating and other different heating methods.



LED灯检箱 Led light checking box

特点:

- 1、机架坚固、实用;
- 2、上、下二面LED灯屏、亮度是传统灯箱3倍;
- 3、独特的光线可调功能、最大限度的保证了在各种工作情况下灯检的质量。

Features:

- 1 Rack solid, practical;
- 2 The upper and lower side of the LED light screen, brightness is 3 times the traditional light box;
- 3 A unique adjustable light function, the maximum guarantee in a variety of work conditions, the quality of light inspection.




桶装水灌装成套设备
**BARRELED WATER WHOLE-SET
 FILLING EQUIPMENT**

全自动套袋机
 Automatic sleeve labeling machine

特点：连续自动套袋，提高工作效率，减少人工成本和人为污染。

Features: With continuous and automatic bagging, it improves working efficiency and reduces labor costs and artificial pollution.

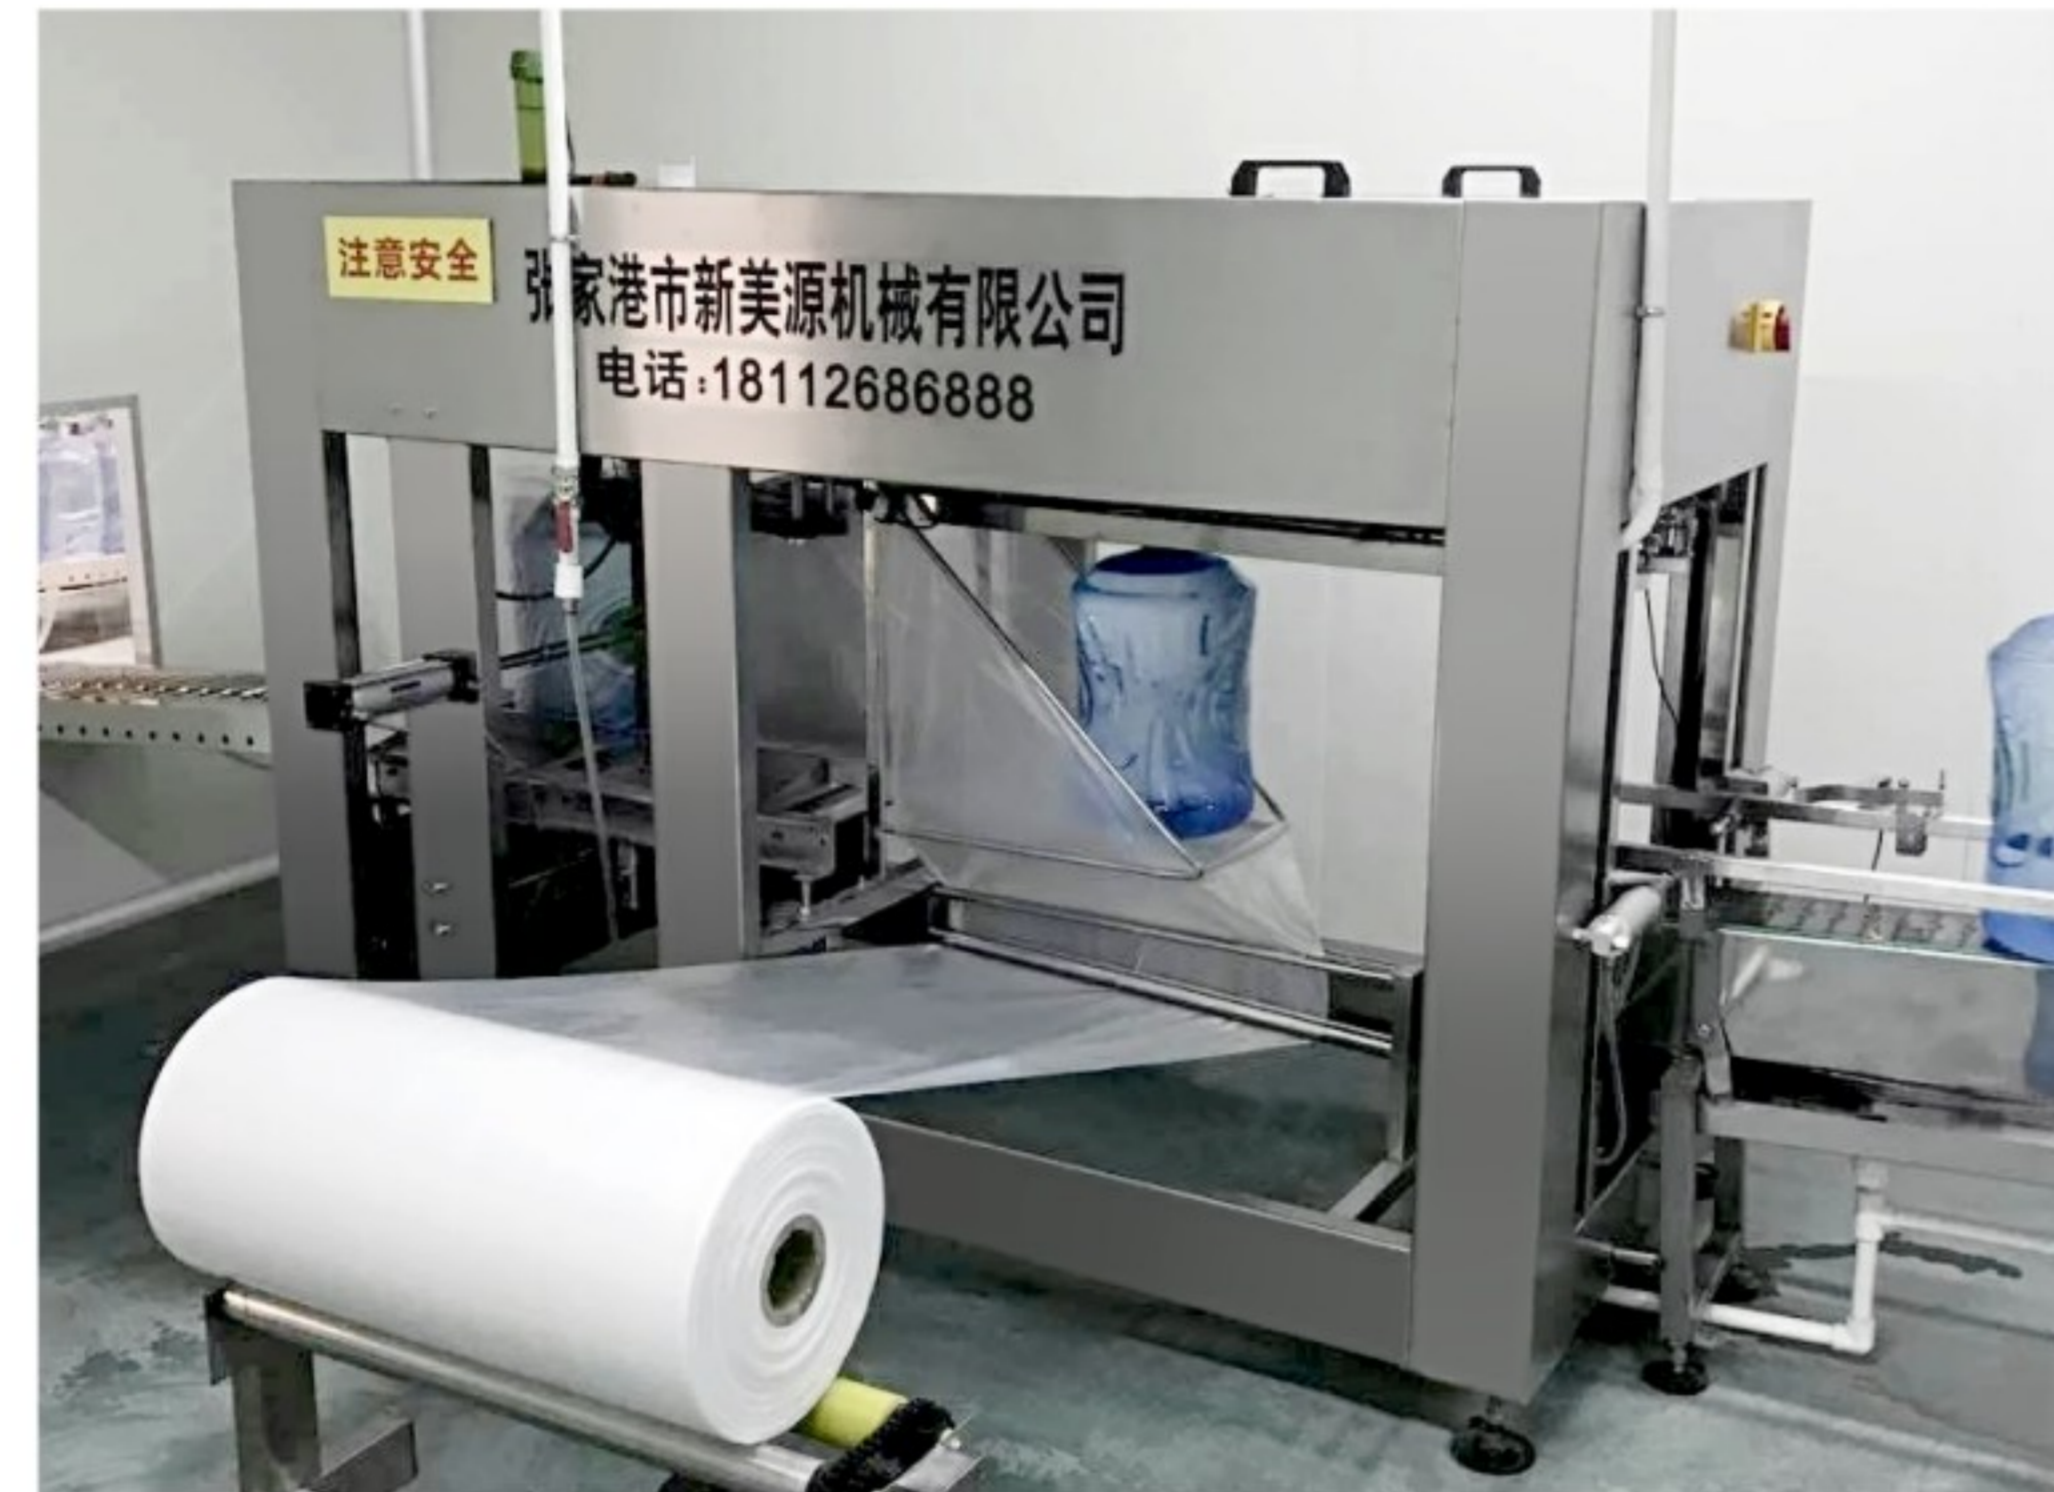

龙门式自动码垛机
 Gantry automatic stacker crane

龙门式自动码垛机(1500桶/小时)：堆叠式码垛，采用滑道式自重力进桶，待机无功率消耗。内置信号检测装置，可自动调节堆叠速度。整机占地面积小，运行能耗低，一人即可完成码垛操作，节约人力资源开销。


Gantry type automatic stacker crane (1500 barrels per hour): stacking pallet, the chute type since gravity into barrels, standby power consumption. Built-in signal detection device can automatically adjust the stack velocity. The machine cover an area of an area small, low energy consumption operation, one can complete pallet, operation to save human resource cost.



旋转式码垛机
 Gantry automatic stacker crane

旋转式码垛机(2400桶/小时)：码垛机提升、吸板和升降部分由电机，齿轮条导向机构驱动，机构运行平稳可靠、生产效率高、故障率低，机器人夹具可根据厂房布局和产能要求，设计一次抓取单排或多排水桶等，设备具有应用灵活性好，适用的产能范围大等特点。

Rotary palletizing machine (2400B/h): stacking machine, suction plate and a lifting part is composed of a motor, the driving gear and rack guide mechanism, mechanism of stable and reliable operation, high production efficiency, low failure rate. Robot fixture according to the plant layout and capacity requirements, design a capture one or more rows of bucket, equipment has good flexibility, wide range of suitable capacity.

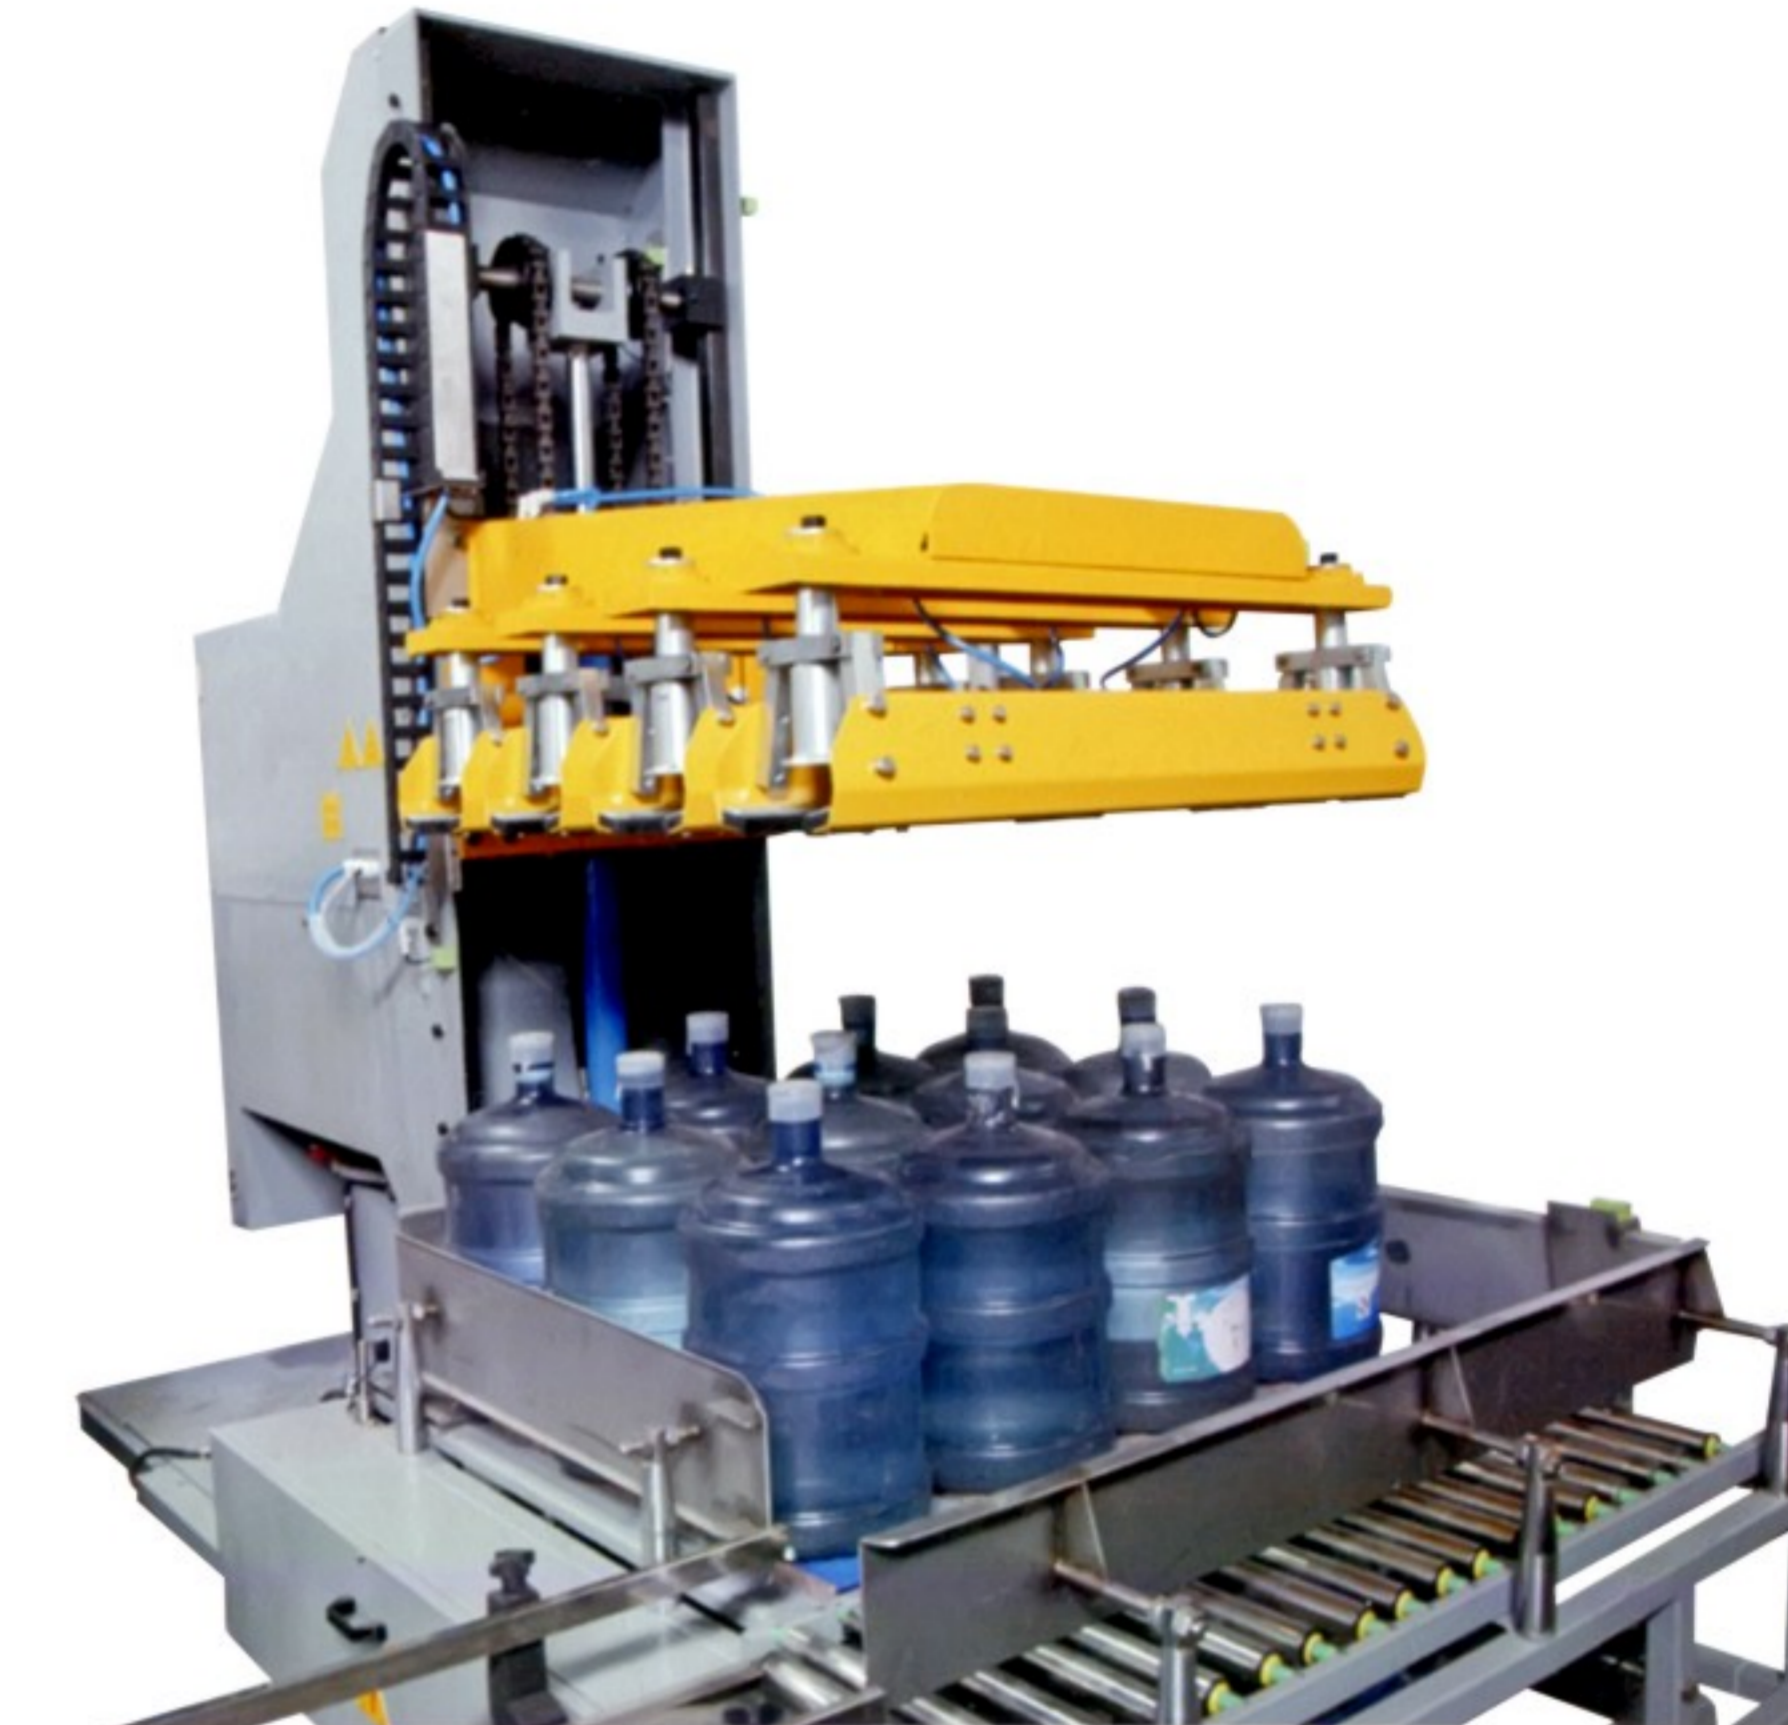

激光打码机
 Laser coders

通过激光直接在桶盖或瓶身打印需要的信息，质检员或消费者无需借助任何辅助工具即可肉眼分辨。设备终生无需添加打印耗材，维护方便，运行成本低。

Through laser direct needs in the lid or the bottle printing information, inspector of consumer without any auxiliary tools can distinguish to the naked eye. equipment for life without adding print consumables, convenient maintenance, low operating cost.

调配系统

DEPLOYMENT SYSTEM



调配罐

PREPARE TANK



方型乳化罐
Square high shear emulsifying tank

本设备采用底部叶轮高速转动，使物料在搅拌、挤压和剪切等物理作用下快速高效地混合。特别适合于对糖类、淀粉类、奶粉类、蛋白粉产品和乳化剂、稳定剂、增稠剂的混合，通常在配方奶粉、酸奶、各种饮料、冰淇淋、蛋卷和华夫饼干的配料流程中使用。在结构设计商，我们采用R圆弧过渡，保证卫生无死角，而且在底部搅拌的密封结构上不断进行技术改造，最大限度地延长了机械密封和轴承的使用寿命，同时为客户节省了一定的使用成本。

高剪切乳化罐是目前国内乳品、饮料果汁、食品等行业最先进的混合设备。高速乳化头工作时转子中心的物料高速抛向定子，通过定子的齿间隙，在转子和定子之间通过剪切、碰撞、粉碎而达到乳化的目的。是集混合、乳化、均质、溶解、粉碎等功能于一体的设备。

主要技术参数 MAIN TECHNICAL PARAMETERS

有效容积 (L) Effective volume	筒体尺寸(Dx h)(mm) Dimension of tank	总高(H)(mm) Total height	保温层 δ (mm) Heat preservation layer	电机功率(kw) Motor power	搅拌速度(r/min) Blending speed
1000	1060 × 1220	2950	60	7.5	1750
2000	1340 × 1500	3400	60	11	1750
3000	1410 × 2000	3900	60	15	1750
4000	1620 × 2000	4030	60	18.5	1750
5000	1810 × 2000	4130	60	22	1750



圆形乳化罐
Round high shear emulsifying tank

This equipment is to blend the materials efficiently under mixing, pressing and cutting by the high-speed rotation of the impeller in the bottom. Which is especially applicable for the mixture of sugar, starch, milk powder, egg powder products with the emulsifying agent, stabilizing agent and thickening agent, usually used in the mixing flow of formula milk powder, acidophilus milk, various drinks, ice cream, egg roll and waffles. We have adopted R-arc transition regarding the structural design to guarantee there is no dead corner to influence the sanitation; furthermore, the technical innovation has been carried out on the sealing structure for the mixing at the bottom to prolong the service life of the mechanic seal and bearing to the largest extent, and it has also saved the service cost for the clients.

High-speed super-fine emulsification tank is the most advanced blending equipment in field of dairy products, beverages, fruit juice and foods etc. When the high-speed super-fine emulsification paddle works, it throw the materials in the center of rotor to stator at a high speed, then through tooth clearance of stator, and shearing, collision and crushing between rotor and stator, the super-fine emulsification is realized. Therefore, it is an integrated equipment comprising functions such as blending, emulsifying, homogenizing, solving and crushing etc.

自动就地清洗系统

AUTOMATIC CIP CLEANING SYSTEM



全自动CIP
Automatic cip



半自动CIP
Semi-automatic cip

概述

CIP清洗系统是食品、药品生产达到卫生标准的前提条件之一，它可以消除活性成分交叉感染，消除异物不溶性微粒，降低或消除微生物及热源对产品的污染。GMP要求尽力食品及制药企业使用CIP在线清洗系统，由于国外全自动CIP系统价格昂贵，制约了我们生产企业的使用。我公司专业技术人员针对诸多问题，在消化吸收国外的先进技术情况下，研制而成的自动化程度高，操作简便，价格合理。

性能特点

灵活、通用

系统可单独进行碱洗，酸洗及热水洗等程序，也可以根据需要订制清洗程序。不仅能有效的将设备清洗干净，而且能控制微生物的生长，同时根据客户要求配置半自动和全自动控制系统。

经济、高效

与手动清洗相比，大大缩减了清洗时间，提高了工作效率；清洗剂和水的使用将更加科学合理；同时蒸汽耗量也相对较小，可以达到合理利用能源的目的；因此有效的降低了清洗成本。

安全可靠

浓酸，浓碱液在埋地式清洗缸中进行，罐内设有液位自动控制和溢流保护系统，独特的出口结构可以防止清洗液析出的结晶堵住管路。

成熟的PLC控制系统

多年的经验积累，使我们的程序更加完善，优质的进口控制元件，可以保证系统长期、稳定的工作；友好的人机界面可以缩短操作人员的培训时间，可以直观设备关键部位的工作状态，通俗易懂的界面可以帮助操作人员判断和处理常见的故障信息，以使设备恢复到正常状态。

Overview

CIP cleaning system is one important factor of the sanitation standard in the food and medicine manufacture, it could remove the cross infection of the liveness, and eliminate the infusibility mote. Reduce or remove the infection of the heat product and the microorganism. GMP requires that the food and medicine manufacture should use the CIP system. Because of the high price from the foreign, the Chinese factor is hardly to fit it. Basic on attracting the advance technical of foreign, Our factory professional researched the high level automation, easy operation and reasonable price CIP.

Performance characteristic

Flexible, general performance

This system could clean in the acid cleaning process, alkali cleaning process and hot water cleaning process separately, also could follow the required to order the cleaning program. It not only cleans the equipment clear, but also controls the microorganisms growth. Even could deploy the automatic and semiautomatic system follow the demand of the clients.

Economics and high efficiency

This equipment greatly reduces the cleaning time and increase the work efficiency compared with cleaning by hand; the use of cleaning liquid and water is more reasonable; meanwhile steam cost id relatively small, so to make full use of energy, and reduce the cleaning cost.

Safe and reliable

Dense acid and dense lye will work in the tanks underground, and set the liquid level controlling system and protect system of the overflow, distinctive exit structure could stop the pipe be blocked by the crystal from the cleaning liquid.

Developed CIP system

The experience accumulated in so many years makes our program better; good quality of the import controlling parts could keep the system operation long time and in balance, through the friendly Man-machine interface, the workers could view the important parts working situation, to find the problems and deal with the fault common, and make the equipment return to normal.

杀菌机

STERILIZATION MACHINE



管式杀菌成套设备
Pipe- uht sterilization machin



板式杀菌成套设备
Plate sterilizing equipment

广泛用于乳品，果汁，饮料，糖浆，酱油，醋，带料的流体，各种浓酱类等。管式杀菌成套设备是专门为乳品，果汁，饮料或类似液体，物料设计的一次杀菌设备，是物料通过杀菌，冷却达到延长保持期的理想设备。可根据用户对不同物料的加热，杀菌，保湿冷却的不同工艺要求，进行流程结合设计，具有安全保护措施，自动化程度高，控制稳定。

PIPE- UHT Sterilization machine be used for the milk ,juice ,beverage, syrup ,soy ,vinegar and the other liquid with grain. It be designed to sterilize the milk ,juice and drink one time, is the ideal equipment for prolonging the keeping time. The flow could be designed follow the of different material demand in heating,sterilization keeping cool and wet, have the safeguard, high level automation and stable control.

超高温瞬时灭菌机

Type Ultra-temperature Instantaneous Sterilizer

本设备主要用于鲜奶、果汁、饮料、酒类等流体物料的杀菌，也可用于豆浆，流体药料的灭菌。

The equipment is mainly used in the sterilization of liquid materials such as fresh milk, juice, beverage and alcohol as well as soybean milk and fluid medicines.



适用于乳品，果汁，茶饮料，啤酒，保健饮料等液体物料的巴氏，超巴氏，超高温杀菌。物料通过本设备杀菌达到延长保持期的目的。并根据客户对物料杀菌，保温，冷却的不同工艺要求，进行单段，双段形式的组合设计，本设备具有很高的热回收率，设备结构紧凑，占地面积小，流程变化灵活，容易操作与维修，深得客户青睐，也可根据客户的需要制造含CIP的超高温杀菌设备。

UHT board-style sterilizer machine is mainly used for Pasteurism, Ultra-pasteurism and Ultra-high temperature sterilization of liquid substances such as milk, juice, tea drinks, beer and health drinks. After the sterilization and cooling, those substances can be kept for longer time. To meet different requirements of sterilization, warm and cooling technique, a mix of single, double or multi-segment system can be designed. The equipment boasts high heat recycling rate. With compact structure, it takes relatively small space. With flexible working flow. It is easy to operation and maintain. This makes it popular among customers. CIP system can also be added into it at the request of customer.



DPL 倒瓶杀菌机

BOTTLE INVERSE STERILIZER MACHINE



倒瓶杀菌机主要用于PET聚酯瓶包装的果汁、茶等饮料热灌装后对瓶口、瓶盖内壁未经杀菌或高温处理的部分进行杀菌。本机主要由传送链系统、瓶体反转链系统、机架、瓶子翻转导杆等构成；本机实现自动翻转杀菌和自复位、而且在杀菌过程中，只须通过瓶子内存物的自身高温对瓶口和瓶盖内壁进行杀菌，不必增加任何热源，达到节能目的。机身采用SUA304材料制作，美观大方、使用方便。产量5000-36000瓶/小时，杀菌时间15-40秒可供用户选择。

It is mainly used in sterilizing PET bottle mouth and inside surface of caps. In which haven't been disinfected by thermal tea. Fruit juice which having been filled in PET bottle. In mainly consist of chief conveying chain system, support, bottle reversing chain system, bottle reversing guiding rod and bottle repositioning rod, use its inner thermal medium to disinfect bottle mouth and caps without any other heat source, so it can save energy. The machine is fully made of SUS304 stainless steel, more convenient in operation. Productivity: 5000-36000 bottles/hour, sterilizing time: about 15-40 seconds.



PLJ 喷淋冷却隧道

SPRAY COOLING TUNNEL



本机用于耐热聚酯瓶茶饮料、热灌装、聚酯瓶碳酸饮料灌装生产线，可使高温灌装的茶饮料降温至36-40℃。产量5000-36000瓶/小时。喷淋时间约15-20分钟。

This machine can reduce the temperature of hot filling drinks to 36°C-40°C, or increase the temperature of cold filling carbonic acid drinks to 36°C-40°C. It is used in PE bottles hot tea drinks and carbonic acid drinks hot filling production line. Productivity: 5000-36000bottles/hour, spray time: about 15-20minutes.



主要技术参数 MAIN TECHNICAL PARAMETERS

型号 Model	XMY-1000	XMY-2000	XMY-3000	XMY-5000	
最高杀菌温度 Higest sterilizing temperature	100°C				
杀菌输送带宽度 Width of sterilization transferring belt	1500mm				
输送带线速度 Transferring belt speed	110-553mm/min(Stepless speed)				
加热蒸汽压力 Heating steam pressure	0.4MPa				
杀菌段长度 Length of sterilization step(mm)	9000	16000	22000	32000	
预冷段长度 Length of pre Cooling step(mm)	1200	1600	1800	2200	
冷却段长度 Length of cooling step(mm)	3000	5000	8000	10000	
加热循环水量 Heating recycling water volume(m³)	21	25	35	50	
电压 Power(kw)	9.6	10.6	13.6	16.5	
设备外形尺寸 Size(mm)	长 Length	9880	17880	23800	34880
	宽 Width	2250	2250	2250	2250
	高 High	1735	1735	1735	1735

套标机\贴标机

SLEEVE ABELING MACHINE & ADHESIVE LABELING MACHINE

为了满足广大顾客生产线对速度的更高要求，我公司研发部精心研究、改良出此产品，在同类产品中属国际领先技术。适用于各种瓶型的果汁、茶饮料、乳制品、纯净水、调味品、啤酒、运行饮料等食品饮料行业。

To meet the requirements of such a wide range customers demanding velocity of their production lines, the research & development department of our company makes research and improvement with great care to manufacture this product. It also employs internationally advanced technology of the same kind. It applies to such food & beverage industries as fruit juices, tea drink, dairy products, pure water, condiments, beer and sports drink and all kinds of other bottle types.




全自动旋转式热熔胶贴标机

ROTARY HOT MELT GLUE LABELING MACHINE

该机适用于连续卷标的粘贴，采用局部涂胶方式，胶消耗量小，运行成本低。

This machine is suitable for sticking the continuous rolled labels, using local gluing methods in small glue consumption and low running costs.

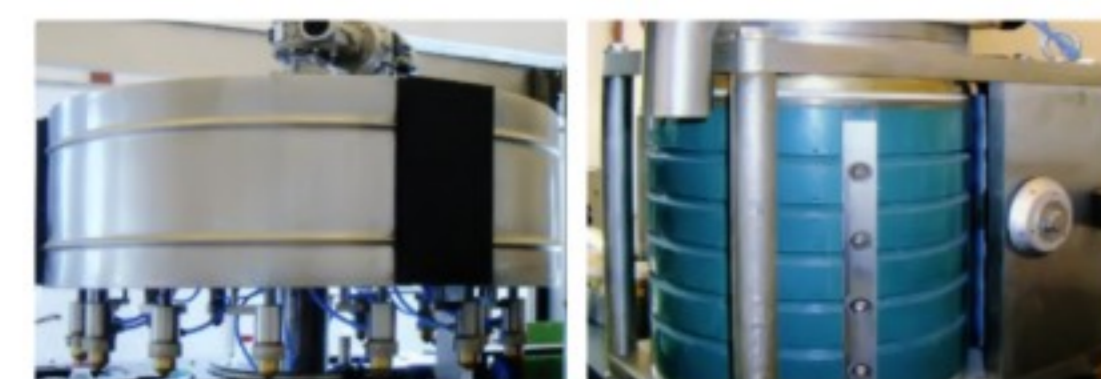

BS 系列全自动热收缩包装机

FULL AUTO HOT SHRINKING PACKAGE MACHINE



专为饮品、纯净水、饮料、果汁、乳制品、的高速度包装要求设计制造产品前进输送过程中，即可自动组合成包，节省时间，提高包装效率。触摸屏操作面板，介面友好，参数设定快捷，便于人机交流及操控。国内中、高速度热收缩包装机领域的最佳首选机型。

Specially designed and manufactured for the high-speed packing requirements of drinks (purewater, beverage, fruit juice, and milk product). During the product forward conveying process, it can automatically group the product into package, so as to save time and enhance packing efficiency.

Touch-screen operating panel with user-friendly interface and convenient parameter setup, absolutely an easy-to-operate machine. The ideal model of middle & high-speed heat-shrinking packager is the first choice in the domestic market.

机器人装箱、码垛机

ROBOT (PACKING, PALLETIZING)



MX 系列旋转式吹瓶机
ROTARY TYPE BLOWING MACHINE



Mx系列旋转式吹瓶机是成功引进德国最新技术，凭借新美源卓越设计能力和制造能力，制造出了具有国际先进水平的全自动高速吹瓶机。成套产品主要由吹瓶主机、加热炉、自动输送装置、电控系统、空压系统等构成。具有自动化程度高、性能稳定、效率高、运行成本低、故障率低等特点。

MX Series rotary blowing machine is the successful introduction of the latest German technology, with TOPSTAR superior design capabilities and manufacturing capacity, to create a high-speed automatic blow molding machine with the international advanced level. Complete product mainly by blowing host, heating, automatic transmission device, electronic control systems, compressed air systems, and the like. The machine has high automation, stable performance, high efficiency, low running costs, low failure rate etc.



SY 系列直线式吹瓶机
LINEAR TYPE BLOWING MACHINE



高性能的感应控制，特殊设计的双臂结构锁模动作，故障率低，效率更高，维修更方便，节约占地空间

It has high property sensor control, specially designed double arm clampings with low fault rate and high efficiency it is convenient for maintenance and saving space.

